

Pocket filter
PROsyntex PLUS PM1 55%
592 x 592 x 535 10 poc.



Filter class acc. to ISO 16890	Particle efficiency		Energy consumption	Energy class
EN 779:2012				Threshold reference scale year 2019: (RS 4/C/001-2019)
ISO ePM1 55% F7	ePM ₁	55 %	1.050 kWh/year	B
	ePM _{2,5}	70 %		
	ePM ₁₀	90 %		



Similar to picture

Operating conditions:	
Max. humidity resistance	100%
Max. temperature	70°C
Recommended final pressure drop	300 Pa
Max. airflow (short term usage possible)	1,25 x nominal air flow
Fire behaviour	EN13501-1;ISO11925-2 (E)

Medium

Media color

Synthetic-progressive microfiber

White


Please note: in EUROVENT database, the depth of the model is extended by 25 mm

WIDTH	HEIGHT	DEPTH	Number of pockets	Filter area	Recommended nominal air flow	Initial pressure drop
[mm]	[mm]	[mm]		[m ²]	[m ³ /h]	[Pa]
592	592	535	10	6,3 (x2)**	3.400	95
490	592	535	8	5,1 (x2)**	2.800	95
287	592	535	5	3,2 (x2)**	1.700	95
592	287	535	10	3,1 (x2)**	1.700	95
592	490	535	10	5,2 (x2)**	2.800	95
287	287	535	5	1,5 (x2)**	800	95
592	892	535	10	9,5 (x2)**	5.100	95
490	892	535	8	7,6 (x2)**	4.100	95
287	892	535	5	4,8 (x2)**	2.600	95

** Thanks to the wave shape of the filter medium, this filter area is considered to be doubled.

Product benefits:

- New upgraded generation of synthetic pocket filter
- Multi layer structure of the filter media
- Lowest initial pressure drop in the Syntex-filter serie
- High filtration efficiency
- Up to double dust-holding capacity
- High energy savings
- Life cycle cost reduction
- Lower CO2 emissions
- Filter media tested according to OEKO-TEX® Standard 100 for harmful chemical substances (17.0.25812)
- For use in air-conditioning and ventilation systems of all kinds as well as in painting technology

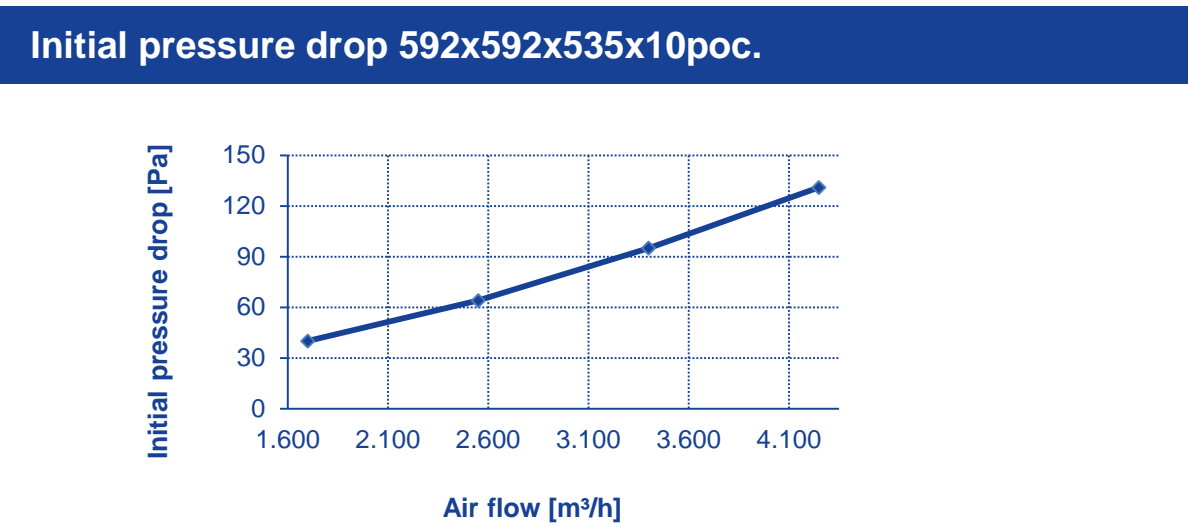

Versions:

- Plastic frame: 25 mm
- Metal fram: 20 mm, 25 mm
- Special sizes on request
- Version wit plastic frame fully incinerable
- Optional with foamed hygiene gasket



Notice:
All information and illustrations are sole property of Volz and are provided to the best of our company's knowledge. Yet our company does not take over any warranty for the completeness and/ or correctness and cannot be held liable for any damage occurring to the recipient through the use or through her or his trust in the completeness and/ or correctness of the information. The given data are mean values with tolerances due to normal production variations and do not release the recipient from own checks, investigations and test. Furthermore, all data serve as service description and shall not be interpreted as a warranty for composition or service life. Volz reserves the right to change specifications without notice.