

Filtration media Meltblown PROsyntex Material PM1 80%



Filter class acc. to ISO 16890	Particle efficiency	Filter class acc. to EN 779:2012
ISO ePM1 80	ePM ₁	80 %
	ePM _{2,5}	80 %
	ePM ₁₀	90 %
		F9

Filter class and efficiency based on ISO testing of a pocket filter 592 x 592 x 600/BET

Operating conditions:

Max. humidity resistance	100 %
Max. temperature	70 °C
Recommended final pressure drop	300 Pa
Potential nominal air flow (short term usage possible)	1,25 x nominal air flow
Fire behaviour	DIN 53438 - 3 (F1)

Medium Synthetic-progressive microfiber

Media color White



Store in a dry and clean place, protect from moisture and sunlight. Storage temperature between 0 °C and 35 °C. Store the rolls vertically. The maximum relative humidity of the storage conditions is 85%. Storage time max. 2 years from the delivery date. Storage and transport in the original packaging.


Technical data

Filter area	[m ²]	1
Surface weight approx.	[g/m ²]	205
Material thickness approx.	[mm]	4,5
Recommended nominal air flow	[m ³ /h/m ²]	600
Air velocity	[m/s]	0,17
Initial pressure drop	[Pa]	130

Product benefits:

- Multi-layer structure of the filter media
- Shatter-proof synthetic fibres
- Progressive structure ensures full utilisation of the filter media
- BIOSTATIC version ideally to be used when hygiene demands are high and in environments with increased air humidity
- Testing for paint compatibility by Fraunhofer IPA (not valid for the biostatic version)
- For use in air-conditioning and ventilation systems of all kinds as well as in painting technology

Initial pressure drop

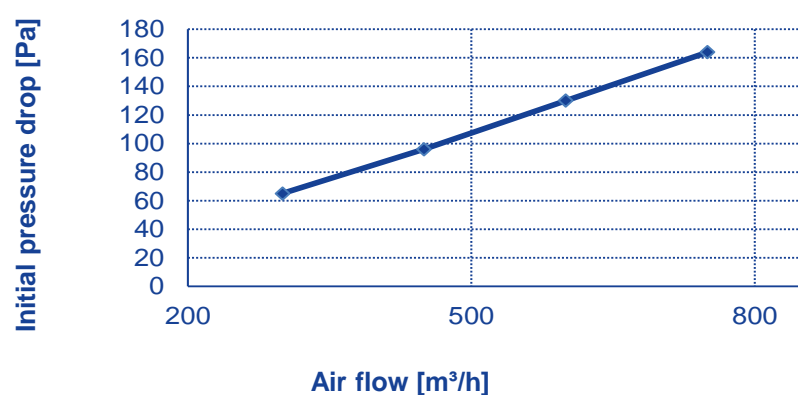

Versions:

- Available in rolls
- Also available in the following versions: welded endless pockets, sewn, precuts for finished dimension
- Optional **BIOSTATIC version**: the ingredients located within the synthetic fibers „BIO-Hunter RX-106“ and "Silver-Phosphate-Glass" (BIOZIDE) prevent odors and the formation of microorganisms on the filter which is harmful to the health

- Standard roll length: 150,00 m
- Standard roll width: 1,53 m
- Maximum cut length: 10,00 m



Notice:

All information and illustrations are sole property of Volz and are provided to the best of our company's knowledge. Yet our company does not take over any warranty for the completeness and/ or correctness and cannot be held liable for any damage occurring to the recipient through the use or through her or his trust in the completeness and/ or correctness of the information. The given data are mean values with tolerances due to normal production variations and do not release the recipient from own checks, investigations and test. Furthermore, all data serve as service description and shall not be interpreted as a warranty for composition or service life. Volz reserves the right to change specifications without notice.