


Panel filter HT Filter pack AL200



Filter class acc. to ISO 16890	Filter class acc. to EN 779:2012
ISO ePM10 50%	M5

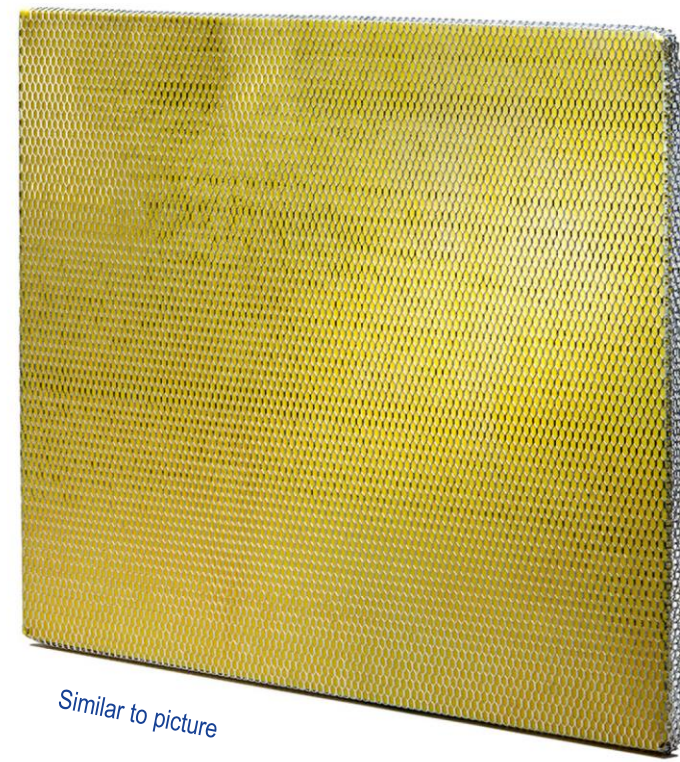

Similar to picture

Operating conditions:

Max. humidity resistance	100 %
Max. temperature	200 °C
Recommended final pressure drop	300 Pa
Max. airflow (short term usage possible)	1,25 x nominal air flow

Medium	Glass
Media color	Yellow




Store in a dry place, protect from direct sunlight. Storage temperature between 15°C and 25°C. Humidity during storage between 30% and 70% RH. Storage time: max.6 months from the delivery date. Storage and transport in the original packaging.

WIDTH	HEIGHT	DEPTH	Filter area	Recommended nominal air flow	Initial pressure drop
[mm]	[mm]	[mm]	[m²]	[m³/h]	[Pa]
480	480	14	0,23	500	105

Product benefits:

- Elastic glass fibre medium
- On clean air side with cover fleece
- Edged in aluminium expanded mesh
- For filtration of the circulating air in drying cabins or drying ovens in the car manufacturing and painting industry

Initial pressure drop 480x480x14

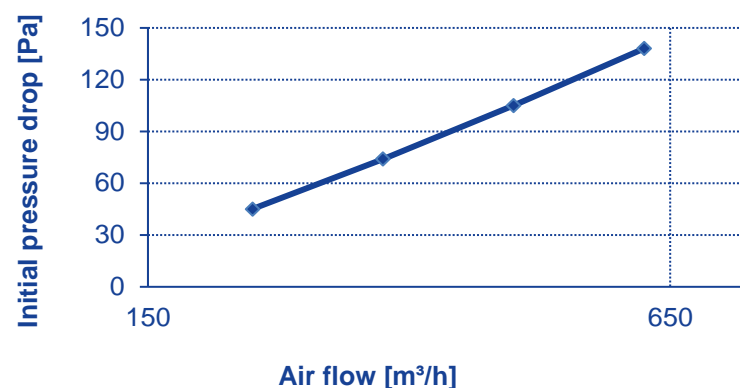

Versions:

- Frame: aluminium expanded mesh on both sides

Notice:

All information and illustrations are sole property of Volz and are provided to the best of our company's knowledge. Yet our company does not take over any warranty for the completeness and/ or correctness and cannot be held liable for any damage occurring to the recipient through the use or through her or his trust in the completeness and/ or correctness of the information. The given data are mean values with tolerances due to normal production variations and do not release the recipient from own checks, investigations and test. Furthermore, all data serve as service description and shall not be interpreted as a warranty for composition or service life. Volz reserves the right to change specifications without notice.