

# Filtration media Polyester

## Pocket filter material ISO Coarse 50%



Similar to picture

Filter class acc. to ISO 16890	Particle efficiency	Filter class acc. to EN 779:2012
ISO Coarse 50%		G3

*Filter class and efficiency based on ISO testing of a pocket filter 592 x 592 x 600/6ET*

### Operating conditions:

Max. humidity resistance	100 %
Max. temperature	80 °C
Recommended final pressure drop	200 Pa
Max. airflow (short term usage possible)	1,25 x nominal air flow
Fire behaviour	DIN 53438 - 3 (F1)

Medium Polyester  
Media color  White



Store in a dry and clean place, protect from moisture and sunlight. Ensure sufficient air supply. Store the rolls vertically. Storage temperature between 0°C and 40°C. Storage time max. 2 years from the delivery date. Storage and transport in the original packaging.


### Technical data

Filter area	[m <sup>2</sup> ]	1
Surface weight approx.	[g/m <sup>2</sup> ]	150
Material thickness approx.	[mm]	10,0
Recommended nominal air flow	[m <sup>3</sup> /h/m <sup>2</sup> ]	750
Air velocity	[m/s]	0,21
Initial pressure drop	[Pa]	3

### Product benefits:

- Progressive structure-filter media is compressed towards clean air side and takes full depth of fibrous web for dust absorption
- Shatter-proof synthetic fibres
- Testing for paint compatibility by Fraunhofer IPA
- For use in air-conditioning and ventilation systems of all kinds as well as in painting technology

### Initial pressure drop

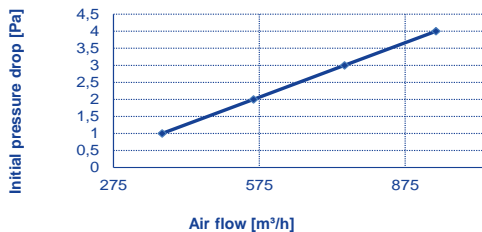

### Versions:

- Available in rolls
- Also available in the following versions: welded endless pockets, precuts for finished dimension
- Standard roll length: 90,00 m
- Maximum roll width: 2,30 m
- Maximum cut length: 10,00 m



**Notice:**

All information and illustrations are sole property of Volz and are provided to the best of our company's knowledge. Yet our company does not take over any warranty for the completeness and/ or correctness and cannot be held liable for any damage occurring to the recipient through the use or through her or his trust in the completeness and/ or correctness of the information. The given data are mean values with tolerances due to normal production variations and do not release the recipient from own checks, investigations and test. Furthermore, all data serve as service description and shall not be interpreted as a warranty for composition or service life. Volz reserves the right to change specifications without notice.