

Pocket filter  
PROsyntex PLUS PM1 65%  
592 x 592 x 635 10 poc.




Filter class acc. to ISO 16890	Particle efficiency		Energy consumption	Energy class
EN 779:2012				Threshold reference scale year 2019: (RS 4/C/001-2019)
ISO ePM1 65% F8	ePM <sub>1</sub>	65 %	850 kWh/year	A+
	ePM <sub>2,5</sub>	70 %		
	ePM <sub>10</sub>	90 %		



Similar to picture

Operating conditions:	
Max. humidity resistance	100%
Max. temperature	70°C
Recommended final pressure drop	300 Pa
Max. airflow (short term usage possible)	1,25 x nominal air flow
Fire behaviour	EN13501-1;ISO11925-2 (E)

Medium Synthetic-progressive microfiber  
Media color ☐ White

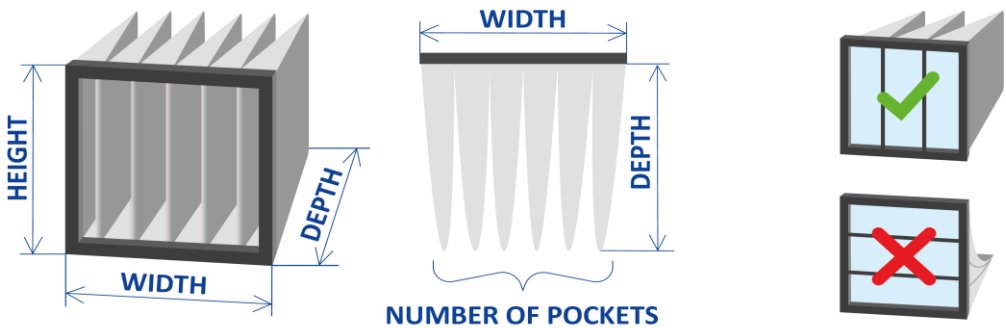

Please note: in EUROVENT database, the depth of the model is extended by 25 mm


WIDTH	HEIGHT	DEPTH	Number of pockets	Filter area	Recommended nominal air flow	Initial pressure drop
[mm]	[mm]	[mm]		[m <sup>2</sup> ]	[m <sup>3</sup> /h]	[Pa]
592	592	635	10	7,5 (x2)**	3.400	85
490	592	635	8	6 (x2)**	2.700	85
287	592	635	5	3,8 (x2)**	1.700	85
* 592	287	635	10	3,6 (x2)**	1.600	85
* 592	490	635	10	6,2 (x2)**	2.800	85
* 287	287	635	5	1,8 (x2)**	800	85
* 592	892	635	10	11,3 (x2)**	5.100	85
* 490	892	635	8	9,1 (x2)**	4.100	85
* 287	892	635	5	5,7 (x2)**	2.600	85

\* Sewn version  
\*\* Thanks to the wave shape of the filter medium, this filter area is considered to be doubled.

Product benefits:

- New upgraded generation of synthetic pocket filter
- Multi layer structure of the filter media
- Lowest initial pressure drop in the Syntex-filter serie
- High filtration efficiency
- Up to double dust-holding capacity
- High energy savings
- Life cycle cost reduction
- Lower CO2 emissions
- Ultrasonic welded endless pockets
- Filter media tested according to OEKO-TEX® Standard 100 for harmful chemical substances (17.0.25812)
- For use in air-conditioning and ventilation systems of all kinds as well as in painting technology

Initial pressure drop 592x592x635x10poc.

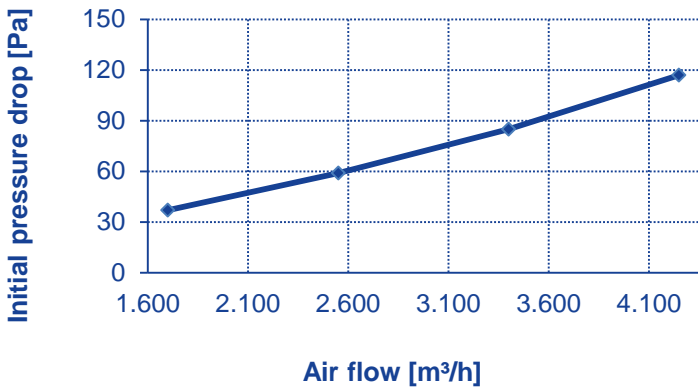

Versions:

- Plastic frame: 25 mm
- Metal fram: 20 mm, 25 mm
- Special sizes on request
- Version wit plastic frame fully incinerable
- Optional with foamed hygiene gasket



Notice:  
All information and illustrations are sole property of Volz and are provided to the best of our company's knowledge. Yet our company does not take over any warranty for the completeness and/ or correctness and cannot be held liable for any damage occurring to the recipient through the use or through her or his trust in the completeness and/ or correctness of the information. The given data are mean values with tolerances due to normal production variations and do not release the recipient from own checks, investigations and test. Furthermore, all data serve as service description and shall not be interpreted as a warranty for composition or service life. Volz reserves the right to change specifications without notice.